



No.:

Date: 15-OCT-2019

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : W21 - Cast Iron Frame - Premium Efficiency - IE3

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 15-OCT-2019

DATA SHEET

Three-phase induction motor - Squirrel cage rotor

Customer :
Product line : W21 - Cast Iron Frame - Premium Efficiency - IE3

Frame : 225S/M
Output : 37 kW
Frequency : 50 Hz
Poles : 4
Full load speed : 1480 rpm
Slip : 1.33 %
Voltage : 400/690 V
Rated current : 66.1/38.3 A
Locked rotor current : 562/326 A
Locked rotor current (I_L/I_n) : 8.5
No-load current : 23.5/13.6 A
Full load torque : 239 Nm
Locked rotor torque : 280 %
Breakdown torque : 320 %
Design : ---
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 10 s (hot)
Service factor : 1.15
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 380 kg
Moment of inertia : 0.69987 kgm²
Noise level : 70 dB(A)

	D.E.	N.D.E.
Bearings	6314 C3	6314 C3
Regreasing interval	11638 h	11638 h
Grease amount	27 g	27 g

Load	Power factor	Efficiency (%)
100%	0.86	93.9
75%	0.82	93.9
50%	0.73	93.0

Notes:

Efficiencies according to the indirect method of IEC 60034-2-1:2007 with stray load losses determined from measurement.

Performed by

Checked




No.:

Date: 15-OCT-2019

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

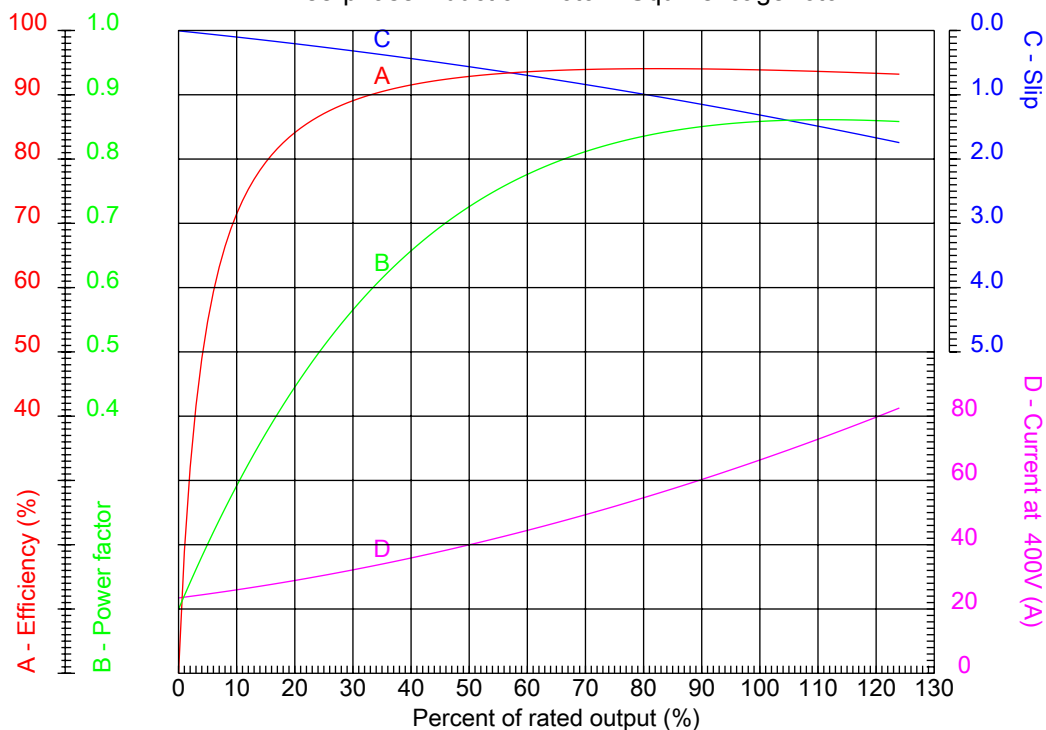

Customer :
Product line : W21 - Cast Iron Frame - Premium Efficiency - IE3

Frame	: 225S/M	Locked rotor current (I _L /I _n)	: 8.5
Output	: 37 kW	Duty cycle	: S1
Frequency	: 50 Hz	Service factor	: 1.15
Full load speed	: 1480 rpm	Design	: ---
Voltage	: 400/690 V	Locked rotor torque	: 280 %
Rated current	: 66.1/38.3 A	Breakdown torque	: 320 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 15-OCT-2019

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

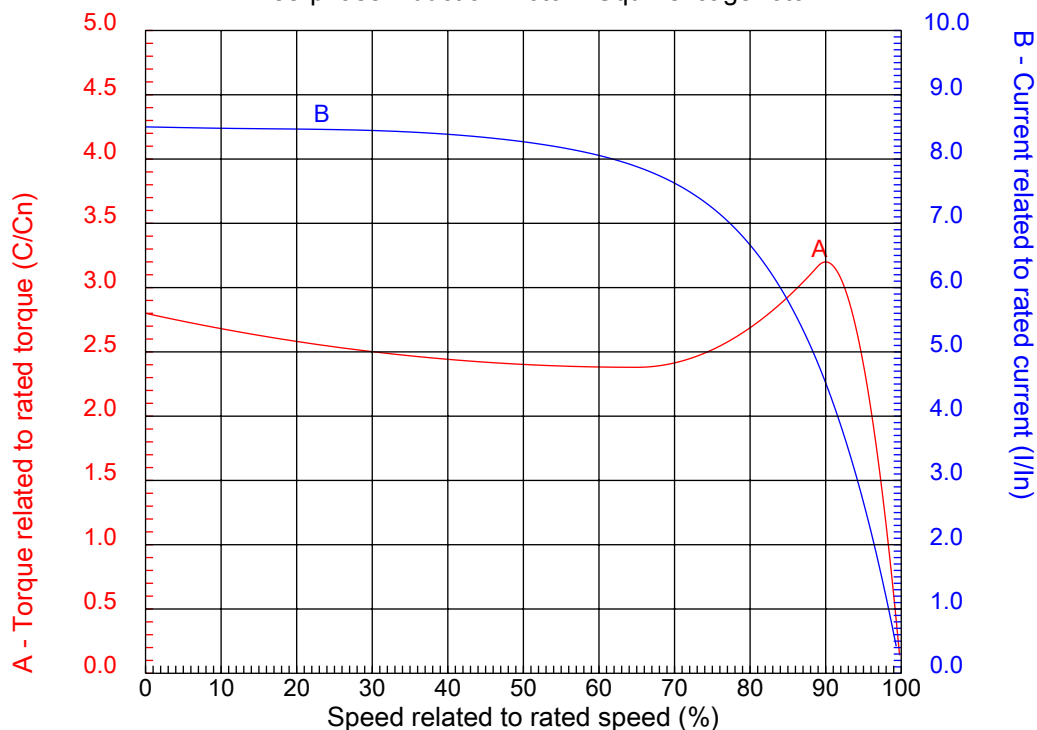

Customer :
Product line : W21 - Cast Iron Frame - Premium Efficiency - IE3

Frame	: 225S/M	Locked rotor current (I _L /I _n)	: 8.5
Output	: 37 kW	Duty cycle	: S1
Frequency	: 50 Hz	Service factor	: 1.15
Full load speed	: 1480 rpm	Design	: ---
Voltage	: 400/690 V	Locked rotor torque	: 280 %
Rated current	: 66.1/38.3 A	Breakdown torque	: 320 %
Insulation class	: F		

Notes:

Performed by

Checked

